



ORDERING CODE
SSI

EAM 63A R 512 / 512 G 8/28 S X X 10 X 3 MC R .XXX

SERIES
multiturn absolute encoder EAM

MODEL
synchronous flange ø 31.75 mm 63A
synchronous flange ø 50 mm 58B
clamping flange ø 36 mm 58C
centering square flange ø 31.75 mm 63D
centering square flange ø 50 mm 63E

rev. 2.0 R

MULTITURN RESOLUTION
(powers of 2) turns from 2 to 16384

SINGLETURN RESOLUTION
(powers of 2) ppr from 2 to 8192

CODE TYPE
binary B
gray G

POWER SUPPLY
8 ... 28 V DC 8/28

ELECTRONIC INTERFACE
Serial Synchronous Interface - SSI S

LOGIC
to be reported X

OPTIONS
to be reported X

SHAFT DIAMETER
(mod. 58 B) mm 6
(mod. 63 A / D) (9,52mm 3/8") mm 9
(mod. 58 C - 63 A / D / E) mm 10

ENCLOSURE RATING
IP 54 X
IP 66 S

MAX ROTATION SPEED
(IP 66) 3000 rpm 3
(IP 54) 6000 rpm 6

OUTPUT TYPE
cable (standard length 1,5 m) PC
7 pin MIL connector MC
12 pin M23 connector HA
8 poles M12 connector M12


female connector included, without female please add 162 as variant code

DIRECTION TYPE
axial A
radial R

VARIANT
custom version XXX


EAM 63 A

fixing clamps not included

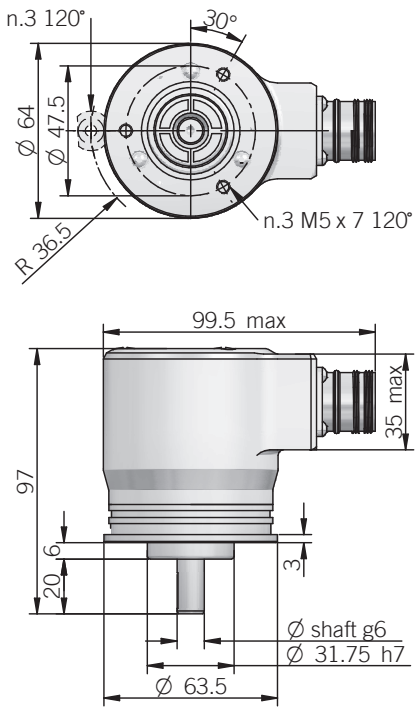


EAM 58 B


fixing clamps not included

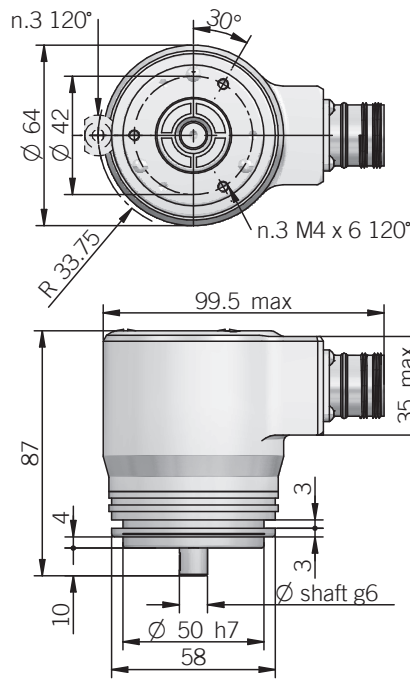


EAM 58 C

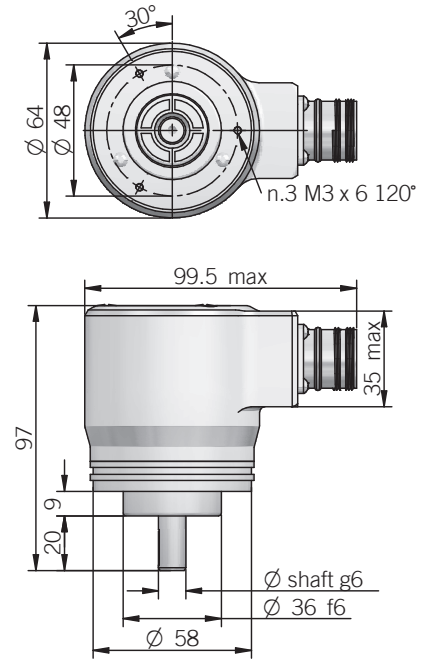


EAM 63 D

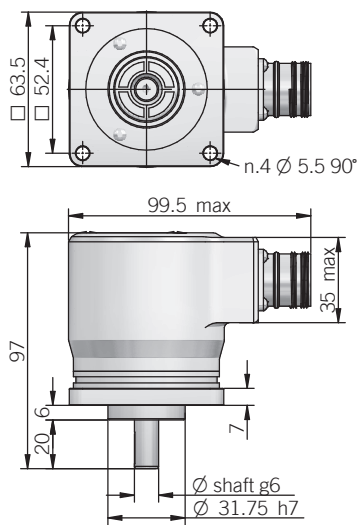

EAM 63 E

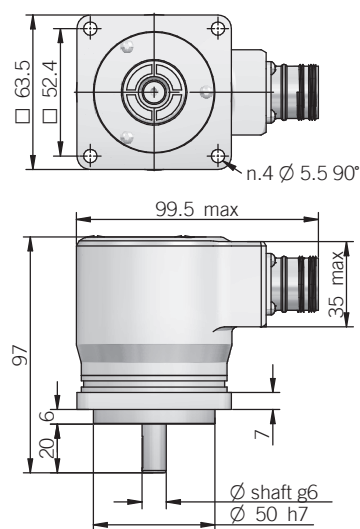

Dimensions with axial output

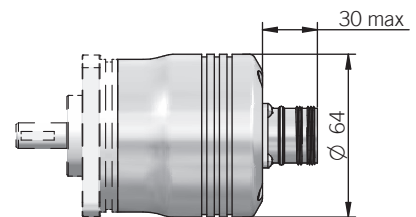

BIT PARALLEL CONNECTIONS

Function	Binary / Gray	Cable output PD	Cable output PE	19 pin MA connector	32 pin ME connector
bit 1 (LSB)	B ⁰ / G ⁰	green	green	A	A
bit 2	B ¹ / G ¹	yellow	yellow	B	B
bit 3	B ² / G ²	blue	blue	C	C
bit 4	B ³ / G ³	brown	brown	D	D
bit 5	B ⁴ / G ⁴	orange or pink	orange or pink	E	E
bit 6	B ⁵ / G ⁵	white	white	F	F
bit 7	B ⁶ / G ⁶	grey	grey	G	G
bit 8	B ⁷ / G ⁷	purple	purple	H	H
bit 9	B ⁸ / G ⁸	grey / pink	grey / pink	J	J
bit 10	B ⁹ / G ⁹	white / green	white / green	K	K
bit 11	B ¹⁰ / G ¹⁰	brown / green	brown / green	L	L
bit 12	B ¹¹ / G ¹¹	white / yellow	white / yellow	M	M
bit 13	B ¹² / G ¹²	yellow / brown	yellow / brown	N	N
bit 14	B ¹³ / G ¹³	/	white / grey	/	P
bit 15	B ¹⁴ / G ¹⁴	/	grey / brown	/	R
bit 16	B ¹⁵ / G ¹⁵	/	white / pink	/	S
bit 17	B ¹⁶ / G ¹⁶	/	pink / brown	/	T
bit 18	B ¹⁷ / G ¹⁷	/	white / blue	/	U
bit 19	B ¹⁸ / G ¹⁸	/	brown / blue	/	V
bit 20	B ¹⁹ / G ¹⁹	/	white / red	/	W
bit 21	B ²⁰ / G ²⁰	/	brown / red	/	X
bit 22	B ²¹ / G ²¹	/	white / black	/	Y
bit 23	B ²² / G ²²	/	brown / black	/	Z
bit 24	B ²³ / G ²³	/	grey / green	/	a
bit 25	B ²⁴ / G ²⁴	/	yellow / pink	/	b
bit 26	B ²⁵ / G ²⁵	/	yellow / blue	/	c
bit 27	B ²⁶ / G ²⁶	/	green / blue	/	d
LATCH	/	yellow / grey	yellow / grey	R	e
0 Volt	/	black	black	T	j
U / D	/	red / blue	red / blue	U	g
+ Vdc	/	red	red	V	h
⏏	/	shield	shield	S	housing

BIT PARALLEL CONNECTOR OR CABLE CHOICE

According to the resolution and the chosen number of turns is possible to calculate the connections required by the connector or the cable. From the below table is possible to know the connection number.

EXAMPLE 1:
256 PPR = 8 connections
N° turns 32 = 5 connections
Total connections 13.

EXAMPLE 2:
4096 PPR = 12 connections
N° turns 4096 = 12 connections
Total connections 24.

From 1 to 13 connections a 16 cores cable (PD) or a 19 cores connector (MA) have to be considered.


From 14 to 27 connections a 32 cores cable (PE) or a 32 cores connector (ME) have to be considered.

If LATCH is used a cable or a 32 poles connector is required.


SSI CONNECTIONS

Function	Cable output PC	7 pin MC	12 pin HA	8 pin M12
+ Vdc	red	G	8	8
0 Volt	black	F	1	5
data +	green	C	2	3
data -	brown	D	10	2
clock +	yellow	A	3	4
clock -	orange or pink	B	11	6
U / D	red / blue	E	5	7
⏏	shield	housing	9	housing


MC connector (7 pin)
Amphenol MS3102-E-16-S
solder side view FV




HA connector (12 pin) - M23 CCW
Hummel 7.410.000000 -
7.002.912.603
solder side view FV




MA connector (19 pin)
Amphenol 62IN 12E 14-19 P
solder side view FV



ME connector (32 pin)
Glenair IPT 02 A 18-32 P F6
solder side view FV



M12 connector (8 pin)
M12 A coded
solder side view FV





ELECTRICAL SPECIFICATIONS

Multiturn resolution	from 2 to 16384 turns
Singleturn resolution	from 2 to 8192 ppr
Power supply	8/28 = 7,6 ... 29,4 V DC
Current consumption without load	100 mA
Max load current	20 mA / channel
Output type	P = push pull (active short circuit protection)* S = RS-422
Auxiliary inputs (U/D - Latch)	active high (+Vdc) <i>connect to 0V if not used</i>
Max frequency	output: 25 kHz LSB (Bit Parallel) clock input: 100 kHz ... 1 MHz (SSI)
SSI monostable time (Tm)	18 μs
SSI pause time (Tp)	> 35 μs
Accuracy	± 1/2 LSB
SSI frame	Tree format (MSB ... LSB) up to 12 bit multiturn = lenght 25 bit (12MT + 13ST) 13 to 14 bit multiturn = lenght 27 bit (14MT + 13ST)
Counting direction	decreasing clockwise (shaft view)
Start-up time	150 ms
Electromagnetic compatibility	IEC 61000-6-2 IEC 61000-6-4

*output levels according to power supply, for further details please see under Technical basics section

MECHANICAL SPECIFICATIONS

Shaft diameter	ø 6 / 9,52 (3/8") / 10 mm
Enclosure rating	X = IP 54 (IEC 60529) S = IP 66 (IEC 60529)
Max rotation speed	3000 rpm (IP 66) 6000 rpm (IP 54)
Max shaft load	10 N axial / 20 N radial with ø6 shaft 100 N axial / radial
Shock	50 G, 11 ms (IEC 60068-2-27)
Vibration	10 G, 10 ... 2000 Hz (IEC 60068-2-6)
Moment of inertia	1,5 x 10 ⁻⁶ kgm ²
Starting torque	< 0,02 Nm (IP 54) < 0,06 Nm (IP 66)
Body material	EN-AW 2011 aluminum
Shaft material	1.4305 / AISI 303 stainless steel
Housing material	painted aluminium
Bearings	2 ball bearings
Bearings life	10 ⁹ revolutions
Operating temperature	0° ... +60°C (+32° ... +140°F)
Storage temperature	-15° ... +70°C (+5° ... +158°F)
Weight	500 g (17,64 oz)

ACCESSORIES

set n.3 fixing clamps for model 58 B - 63 A
P/N 94080001

