


EAM 90 A - 115 A BIT PARALLEL - SSI SOLID SHAFT MULTITURN ABSOLUTE ENCODER

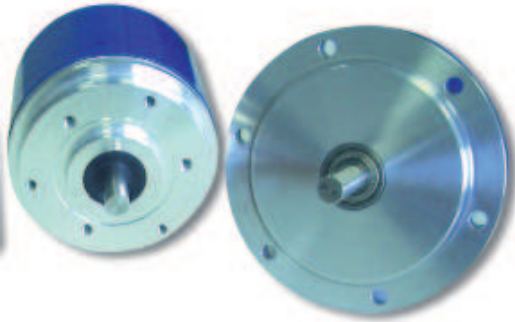

Specifications


Optical absolute multiturn encoder for general factory automation.

- Optical sensor technology (OptoASIC + gears)
- Resolution up to 27 bit (13 bit single turn (8192 ppr) + 14 bit multiturn (16384 turns))
- Power supply up to +28 VDC with Bit Parallel or SSI as electronic interface
- Cable or connector output
- Solid shaft up to 11 mm diameter
- Mounting by synchronous or REO-444 flange


ORDERING CODE	EAM	90A	R	512 / 512	G	8/28	P	P	X	10	X	6	PD	R	.XXX
BIT PARALLEL															
SERIES multiturn absolute encoder	EAM														
MODEL synchronous flange ϕ 40 mm REO444 flange		90A 115A													
			rev. 2.0												
MULTITURN RESOLUTION (powers of 2) turns from				2											
				to											
SINGLETURN RESOLUTION (powers of 2) ppr from				2											
				to											
CODE TYPE binary gray					B G										
POWER SUPPLY 8 ... 28 V DC						8/28									
ELECTRONIC INTERFACE push-pull							P								
LOGIC negative positive								N P							
OPTIONS latch to be reported if not used									L X						
SHAFT DIAMETER (mod. 90) (9,52mm 3/8") mm (mod. 115) mm										9 10 11					
ENCLOSURE RATING IP 54 (mod. 90) IP 66										X S					
MAX ROTATION SPEED (IP 66) 3000 rpm (IP 54) 6000 rpm											3 6				
OUTPUT TYPE (up to 13 bit as total resolution) 16 cores cable (standard length 1,5 m) (from 14 to 27 bit as total resolution or with latch option) 32 cores cable (standard length 1,5 m) (up to 13 bit as total resolution) 19 pin MIL connector (from 14 to 27 bit as total resolution) 32 pin MIL connector female connector included, without female please add 162 as variant code													PD PE MA ME		
DIRECTION TYPE axial radial														A R	
VARIANT custom version															XXX

ORDERING CODE	EAM	90A	R	512 / 512	G	8/28	S	X	X	10	X	6	MC	R	.XXX
SSI															
SERIES multiturn absolute encoder	EAM														
MODEL synchronous flange \varnothing 40 mm RE0444 flange	90A	115A													
			rev. 2.0	R											
MULTITURN RESOLUTION (powers of 2) turns from	2	16384													
SINGLETURN RESOLUTION (powers of 2) ppr from	2	8192													
CODE TYPE binary gray	B	G													
POWER SUPPLY 8 ... 28 V DC	8/28														
ELECTRONIC INTERFACE Serial Synchronous Interface - SSI	S														
LOGIC to be reported	X														
OPTIONS to be reported	X														
SHAFT DIAMETER (mod. 90) (9,52mm 3/8") mm (mod. 115) mm	9	10	11												
ENCLOSURE RATING IP 54 (mod. 90) IP 66	X	S													
MAX ROTATION SPEED (IP 66) 3000 rpm (IP 54) 6000 rpm	3	6													
OUTPUT TYPE cable (standard length 1,5 m) 7 pin MIL connector 12 pin M23 connector 8 pin M12 connector	PC	MC	HA	M12											
<i>female connector included, without female please add 162 as variant code</i>															
DIRECTION TYPE axial radial	A	R													
VARIANT custom version	XXX														


EAM 90 A

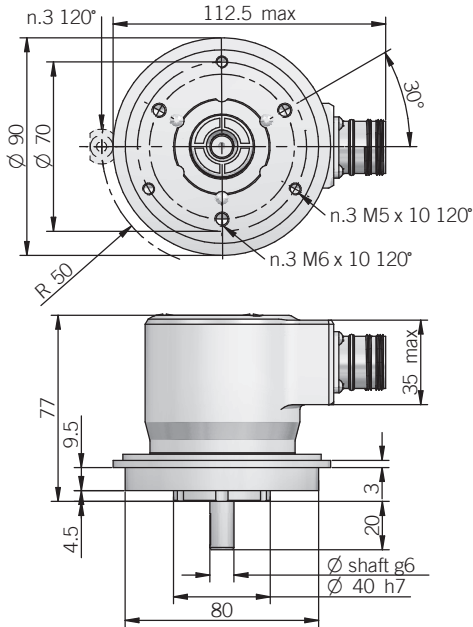

EAM 115 A

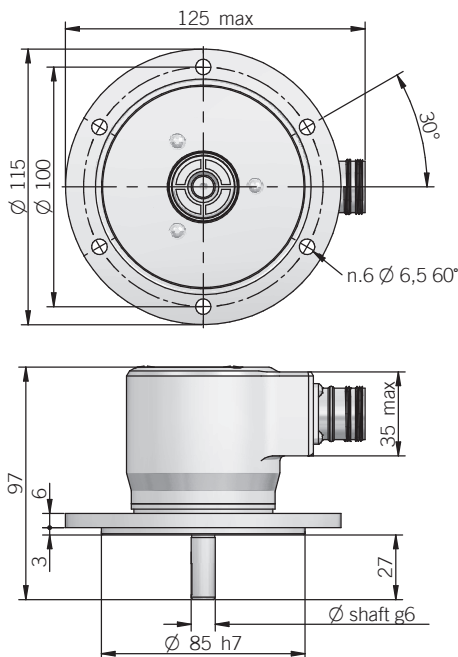

Dimensions with axial output

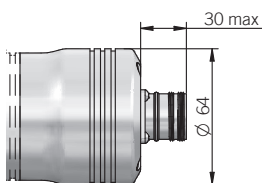

ELECTRICAL SPECIFICATIONS

Multiturn resolution	from 2 to 16384 turns
Singleturn resolution	from 2 to 8192 ppr
Power supply	8/28 = 7,6 ... 29,4 V DC
Current consumption without load	100 mA
Max load current	20 mA / channel
Output type*	P = push pull (active short circuit protection)* S = RS-422
Auxiliary inputs (U/D - Latch)	active high (+Vdc) connect to 0V if not used
Max frequency	output: 25 kHz LSB (Bit Parallel) clock input: 100 kHz ... 1 MHz (SSI)
SSI monostable time (Tm)	18 μ s
SSI pause time (Tp)	> 35 μ s
SSI frame	Tree format (MSB ... LSB) up to 12 bit multiturn = lenght 25 bit (12MT + 13ST) 13 to 14 bit multiturn = lenght 27 bit (14MT + 13ST)
Accuracy	$\pm 1/2$ LSB
Counting direction	decreasing clockwise (shaft view)
Start-up time	150 ms
Electromagnetic compatibility	IEC 61000-6-2 IEC 61000-6-4


*output levels according to power supply, for further details please see under Technical basics section

MECHANICAL SPECIFICATIONS

Shaft diameter	$\varnothing 9,52$ (3/8") / 10 / 11 mm
Enclosure rating	X = IP 54 (IEC 60529) S = IP 66 (IEC 60529)
Max rotation speed	3000 rpm (IP 66) 6000 rpm (IP 54)
Max shaft load	100 N axial / radial
Shock	50 G, 11 ms (IEC 60068-2-27)
Vibration	10 G, 10 ... 2000 Hz (IEC 60068-2-6)
Moment of inertia	$1,5 \times 10^{-6}$ kgm ²
Starting torque (at +20°C / +68°F)	< 0,02 Nm (IP 54) < 0,06 Nm (IP 66)
Body material	EN-AW 2011 aluminum
Shaft material	1.4305 / AISI 303 stainless steel
Housing material	painted aluminium
Bearings	2 ball bearings
Bearings life	10 ⁹ revolutions
Operating temperature	0° ... +60°C (+32° ... +140°F)
Storage temperature	-15° ... +70°C (+5° ... +158°F)
Weight	650 g (22,93 oz)

ACCESSORIES

set n.3 fixing clamps for model 90 A
P/N 94080001



BIT PARALLEL CONNECTIONS

Function	Binary / Gray	Cable output PD	Cable output PE	19 pin MA connector	32 pin ME connector
bit 1 (LSB)	B ⁰ / G ⁰	green	green	A	A
bit 2	B ¹ / G ¹	yellow	yellow	B	B
bit 3	B ² / G ²	blue	blue	C	C
bit 4	B ³ / G ³	brown	brown	D	D
bit 5	B ⁴ / G ⁴	orange or pink	orange or pink	E	E
bit 6	B ⁵ / G ⁵	white	white	F	F
bit 7	B ⁶ / G ⁶	grey	grey	G	G
bit 8	B ⁷ / G ⁷	purple	purple	H	H
bit 9	B ⁸ / G ⁸	grey / pink	grey / pink	J	J
bit 10	B ⁹ / G ⁹	white / green	white / green	K	K
bit 11	B ¹⁰ / G ¹⁰	brown / green	brown / green	L	L
bit 12	B ¹¹ / G ¹¹	white / yellow	white / yellow	M	M
bit 13	B ¹² / G ¹²	yellow / brown	yellow / brown	N	N
bit 14	B ¹³ / G ¹³	/	white / grey	/	P
bit 15	B ¹⁴ / G ¹⁴	/	grey / brown	/	R
bit 16	B ¹⁵ / G ¹⁵	/	white / pink	/	S
bit 17	B ¹⁶ / G ¹⁶	/	pink / brown	/	T
bit 18	B ¹⁷ / G ¹⁷	/	white / blue	/	U
bit 19	B ¹⁸ / G ¹⁸	/	brown / blue	/	V
bit 20	B ¹⁹ / G ¹⁹	/	white / red	/	W
bit 21	B ²⁰ / G ²⁰	/	brown / red	/	X
bit 22	B ²¹ / G ²¹	/	white / black	/	Y
bit 23	B ²² / G ²²	/	brown / black	/	Z
bit 24	B ²³ / G ²³	/	grey / green	/	a
bit 25	B ²⁴ / G ²⁴	/	yellow / pink	/	b
bit 26	B ²⁵ / G ²⁵	/	yellow / blue	/	c
bit 27	B ²⁶ / G ²⁶	/	green / blue	/	d
LATCH	/	yellow / grey	yellow / grey	R	e
0 Volt	/	black	black	T	j
U / D	/	red / blue	red / blue	U	g
+ Vdc	/	red	red	V	h
⊥	/	shield	shield	S	housing

BIT PARALLEL CONNECTOR OR CABLE CHOICE

According to the resolution and the chosen number of turns is possible to calculate the connections required by the connector or the cable. From the below table is possible to know the connection number.

EXAMPLE 1:
256 PPR = 8 connections
N° turns 32 = 5 connections
Total connections 13.

EXAMPLE 2:
4096 PPR = 12 connections
N° turns 4096 = 12 connections
Total connections 24.

From 1 to 13 connections a 16 cores cable (PD) or a 19 cores connector (MA) have to be considered.


From 14 to 27 connections a 32 cores cable (PE) or a 32 cores connector (ME) have to be considered.

If LATCH is used a cable or a 32 poles connector is required.


SSI CONNECTIONS

Function	Cable output PC	7 pin MC	12 pin HA	8 pin M12
+ Vdc	red	G	8	8
0 Volt	black	F	1	5
data +	green	C	2	3
data -	brown	D	10	2
clock +	yellow	A	3	4
clock -	orange or pink	B	11	6
U / D	red / blue	E	5	7
⊥	shield	housing	9	housing


MC connector (7 pin)
Amphenol MS3102-E-16-S
solder side view FV




HA connector (12 pin) - M23 CCW
Hummel 7.410.000000 -
7.002.912.603
solder side view FV



MA connector (19 pin)
Amphenol 62IN 12E 14-19 P
solder side view FV



ME connector (32 pin)
Glenair IPT 02 A 18-32 P F6
solder side view FV



M12 connector (8 pin)
M12 A coded
solder side view FV

